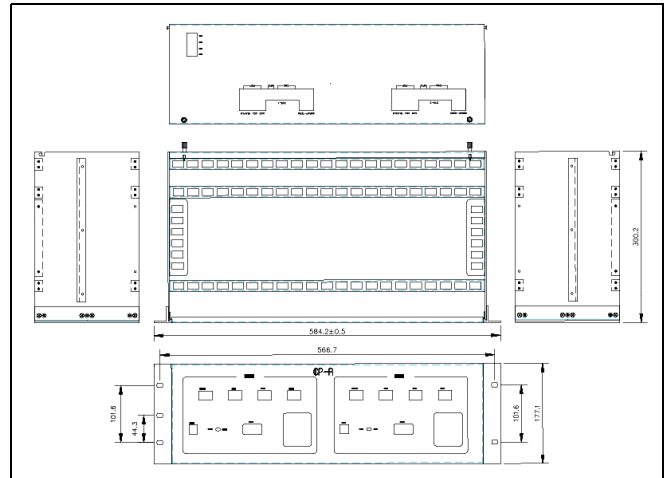
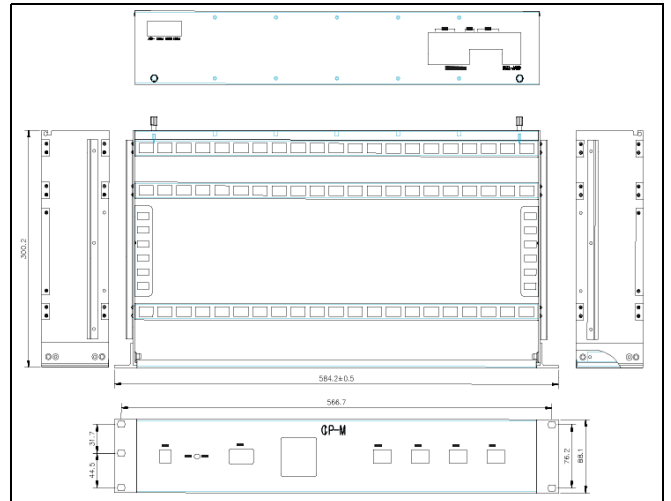


**CIP-R**

**OUTLINE DRAWING (Unit : mm)**

**[CIP-R]**
**CIP-M**

**[CIP-M]**
**SPECIFICATIONS**

- Combines the power alarm signal supplied by the PDP and the alarm signals from the MPU, and outputs visible alarm signals to a front panel of the CIP, and outputs visible and audible alarm signals to the PDP and office
- Capable of testing a lamp and excluding audible alarm signals (ACO)
- Transmits a keypad signal and a 2w/4w selection signal to the OWU
- Capable of transmitting and receiving voice signals between the CIP and OWU
- Transmits PSTN signals which can be used by connecting a private exchange to the PDP unit
- SMOT-16 (2.5Gb/s synchronous optic transmitter) CIP-R: for repeaters
- SMOT-16 (2.5Gb/s synchronous optic transmitter) CIP-M: for single stations