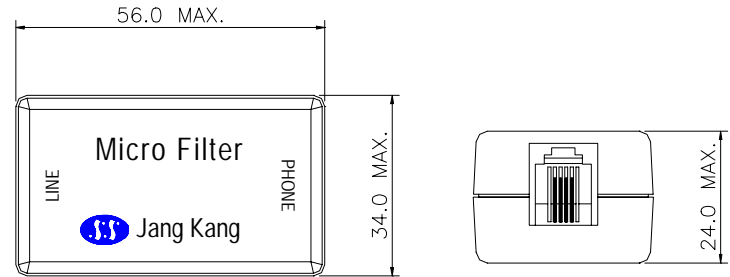


JK-SP6014

OUTLINE DRAWING (Unit : mm)

SPECIFICATIONS

- Insertion Loss @ 1004Hz : 0.2 dB Max.
- Attenuation Distortion @ 0.2~3.4KHz : \pm 0.5 dB Max.
- Attenuation Distortion @ 3.4~4.0KHz : \pm 1.0 dB Max.
- Delay Distortion @ 0.6~3.4KHz : 100us Max.
- Delay Distortion @ 0.2~4.0KHz : 150us Max.
- Return Loss @ 0.2~4.0KHz : 20 dB Min.
- Longitudinal Balance @ 0.2~1.0KHz : 58.0 dB Max.
- Longitudinal Balance @ 1.0~3.0KHz : 53.0 dB Max.
- Attenuation @ 25KHz : 25.0 dB Max.
- Attenuation @ 50~1104KHz : 40.0 dB Max.
- DC Resistance Between TIP-RING : 25 Ω Max.
- Insulation Resistance Between TIP-RING : 5M Ω Min.

FREQUENCY RESPONSE
