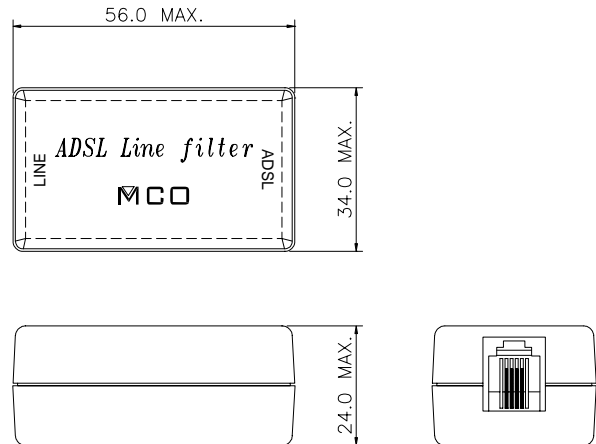
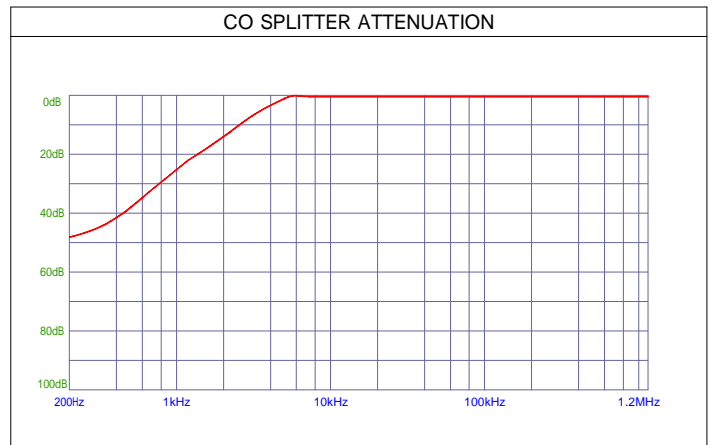


JK-SP6061

OUTLINE DRAWING (Unit : mm)

SPECIFICATIONS

- Attenuation @ 4KHz : 7 dB Min. (Input Level 10dBm)
- Attenuation @ 30~1104KHz : 0.3 dB Max.
(Input Level 10dBm)
- Insulation Resistance Between TIP-RING : 5M Min.
(TIP-RING Open)

FREQUENCY RESPONSE

TEST STRUCTURE
