
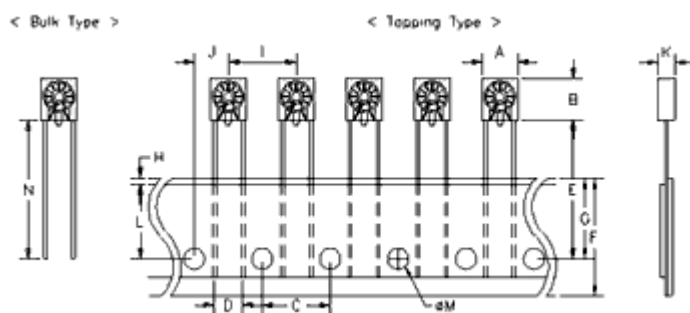



DATA LINE FILTER


A	8.00MAX	B	9.50MAX
C	12.70±0.3	D	5.30±0.5
E	18.50MAX	F	18.25±0.75
G	9.50±0.5	H	100MAX
I	12.70±1.0	J	6.35±1.3
K	3.50MAX	L	13.00±0.3
M	4.00±0.2		

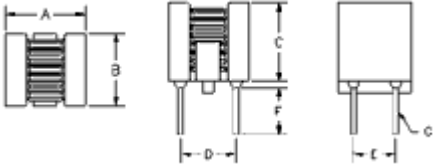

Code No.	Rated Current (mA)	OCL(μ H)	Impedance (Ω MIN) @100Mhz	DCR (mΩ MAX)	Insulation Voltage(VDC)	Insulation Resistance (mΩ MIN)
JK-DLFC 4R7	500	4.7±50%	280	21	200	10
JK-DLFC 8R2	500	8.2±50%	420	25	200	10
JK-DLFC 100	500	10±50%	520	26	200	10
JK-DLFC 220	500	22±50%	1050	35	200	10
JK-DLFC 330	500	33±50%	1680	42	200	10
JK-DLFC 390	500	39±50%	1960	65	200	10
JK-DLFC 560	500	56±50%	2590	85	200	10

				A	7.5MAX
				B	6.4MAX
				C	9.0MAX
				D	5.08±0.5
				E	2.54±0.3
				F	3.20±0.3
				G	0.6Ø
				Code No.	OCL(μ H)
			@40MHz	@60MHz	
JK-DLF1	80μ H±35%	55mΩ	1.6kΩ MIN	2.0kΩ MIN	